



Product Specification Sheet

Aurora 3-way Linear Groundrow



A 625W, 1000W or 1250W asymmetric cyclorama fixture for larger theatres and studios providing a visually even wash of light from a floor position.

Features

Light beam is very smooth and falls off evenly without visible high lights or shadows.

The extruded aluminium reflector guarantees repeatability of beam characteristics.

Robust construction from a combination of aluminium extrusions and formed steel panels.

Filter life is maximised by the dual air-flow chamber construction.

Filter frame size ensures an economic two frame cut out of a standard filter sheet.

The filter frame is flat ensuring it can be mounted into the luminaire with ease.

Adjustable rubber feet isolate the luminaire from vibration and provide tilt adjustment.

Single unit has side hinges for on-site assembly as battens.

Relamp without removing the colour filter holder.

Available with cable tails (2.5m) or multi-connectors

Lamps: 220V -240V

P2/12 1250W
33,750 lumens 200 hours average life

P2/7 1000W
26,000 lumens 200 hours average life

P2/10 625W
16,250 lumens 200 hours average life

Order codes

10AUGRD3L
Aurora 3-way linear Groundrow
Available with Harting or Socapex multi-connectors.


Approvals

CE listing pending.



Photometric data

Tests conducted using a standard 1250W, 240V, 189mm P2/12 lamp.

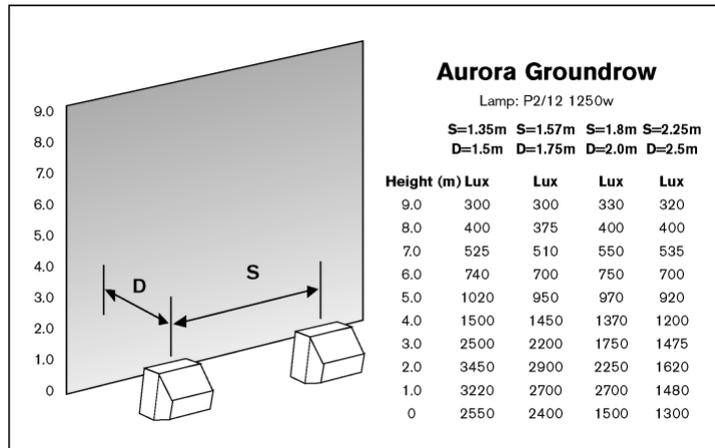


Physical data

Weight - 3-way luminaire: 18.5kg

Weight – 3-way luminaire, packed: 20.9kg

Colour frame size: 305mm x 315mm

Included: 3x colour frames, 2x safety bonds, 2x pipe clamps and instruction leaflet.

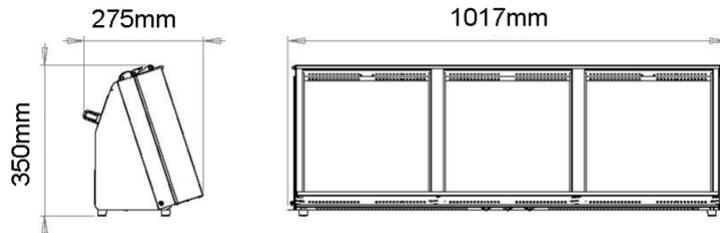

Selecon reserves the right to change the specifications without notice (06/08).