



Product Specification Sheet

Hui Work Light



For overstage, rehearsal lighting the HUI Work Light provides a compact 90° flood beam.

The luminaire is fitted with a wire safety mesh instead of safety glass which allows the air flow system to work in any position for extended operating hours.

This model is not suitable for use with plastic colour filters; no colour frame is supplied.

Features

The HUI Work Light uses either the standard 300W K9 or 500W K1 THD lamp (118mm).

Relamp without having to break focus.

Mains Power Disconnect - microswitch isolation of the mains supply when opening to relamp (phase and neutral) protects against a student or technician inserting a lamp into a live socket.

Mesh safety screen ensures that in the unlikely event of a lamp exploding that the remains are held captive within the luminaire.

Shape the beam and contain glare with the four-door barndoor accessory – fits all models.

Lamps

500W K1	9,900 lumens	2,000hrs average life
300W K9	5,600 lumens	2,000hrs average life
200W K11	3,520 lumens	2,000hrs average life

Order Code

12HUIWK


Approvals

Fully tested and compliant to CE standards.

Physical Data


Weight: Single Work Light - 4.1kg

Included: 1x M12 suspension bolt set and instruction leaflet

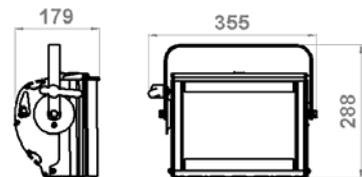

Photometric Data

Tests conducted using a standard 240V, 500W, R7 118mm double-ended linear lamp.

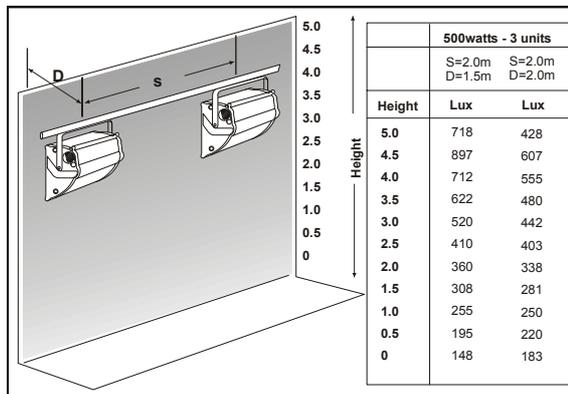

Selecon reserves the right to change the specifications without notice (12/08).