



Product Specification Sheet

Lui Groundrow



PREPARING THE LUI CYC / FLOOD FOR USE AS A GROUNDROW

To modify the Lui Cyc / Flood for groundrow operation, reverse the colour cassette assembly by removing the two screw pivot hinges located on each side of the luminaire.

Invert the colour cassette, then replace the two screws in the new hinge position.

Put the 2 groundrow screw jack feet (Order Code 15HLGDSF) in the threaded holes on the underside of the luminaire.

Swing the yoke to the rear of the luminaire, and position to lift the luminaire off the ground. Adjust the focus by screwing the feet.

WARNING: when the luminaire is in the groundrow position it runs hot, please ensure it is placed on a suitable surface.

Features

The LUI range uses the 1000W K4 or 625W P2/10 R7 lamps (189mm).

Make your own battens using the HUI slot lock joint system that allows a number of units to be locked together.

Relamp without having to remove the filter or break focus.

Filter holder is held captive by spring hinged extruded cover that also blocks unwanted light spill.

One handed operation only required to focus, change filters etc.

Mains Power Disconnect - a microswitch isolates the mains supply when opening to relamp (phase and neutral) protecting against a student or technician inserting a lamp into a live socket.

Safety glass ensures that in the unlikely event of a lamp exploding that the remains are held captive within the luminaire.

Shape the beam and contain glare with the four-door barndoor accessory - fits all models.

Lamps: 220V -240V

1000W K4	24,000 lumens	2000 hours average life
625W P2/10	16,250 lumens	150 hours average life

Order Codes

10LUICYC1
LUI Cyc 1 – 1000W

10LUICYC3
LUI Cyc 3-way Batten – 1000W, cable tails

10LUICYC3G
LUI Cyc 3-way Batten – 1000W, connector terminals

10LUICYC4
LUI Cyc 4-way Batten – 1000W, cable tails

10LUICYC4G
LUI Cyc 4-way Batten – 1000W, connector terminals

10LUIFLD1
LUI Flood 1 – 1000W

10LUIFLD3
LUI Flood 3-way Batten – 1000W, cable tails

10LUIFLD3G
LUI Flood 3-way Batten – 1000W, connector terminals

10LUIFLD4
LUI Flood 4-way Batten – 1000W, cable tails

10LUIFLD4G
LUI Flood 4-way Batten – 1000W, connector terminals

15HLGDSF
Groundrow screw jack feet (set of 2)

15HLJ
Joiner set (2 of) slot locks

15HUIBD
Barndoor – 4 leaf

15HLCF
Spare colour frame

Approvals

Fully tested and compliant to CE standards.




Physical Data

Single **3-way** **4-way**

Weight: 4.1kg 10.7kg 14kg

Colour frame size: 265mm x 203mm

Included: 1 x colour frame per cell, 1 x M12 suspension bolt set and instruction leaflet.

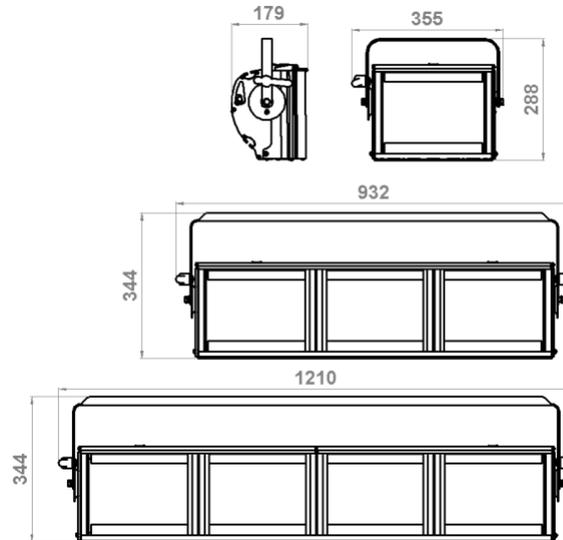

Connector Panels and Options

To suit your needs: www.seleconlight.com/connectors.html

Selecon reserves the right to change the specifications without notice (07/08).