



Product Specification Sheet

Acclaim Zoomspot



A 500W / 650W variable beam profile providing precise beam control and pattern projection capability. The ellipsoidal optical system provides a high output beam with a centre peak. This can be made more even (2:1) by adjusting the position of the lamp in the reflector.

The Acclaim Zoomspot offers efficiency, strength and performance with a choice of two beam angle ranges.

Features

Over 50% more light than most other base down 'T' class 650W luminaires.

Available in 18°-34° or 24°-44° beam angles.

Interchangeable lens tray between Medium and Wide versions.

Uniquely shaped shutters offer wider degree of masking angles.

Adjustable beam Peak-Flat setting.

Slot provided for Iris or rotatable (35°) pattern holder.

Cranked yoke with adjustable balance point.

'Swing-down' doors for easy access to lamp or lens cleaning. Isolates the mains supply when opened.

Captive lamp/ reflector focus system.

Constructed of pressure die-castings and aluminium extrusion.

Lamps

500W T/25, T/18	
11,000 lumens	400 hours average life
650W T/26, T/27	
14,500 lumens	600 hours average life

Order codes

12ACZSMS	Acclaim Zoomspot 18°-34°
12ACZSWMS	Acclaim Zoomspot 24°-44°
15ACIRIS	Acclaim iris
15ACGH	Acclaim rotatable pattern holder
15ACLTS	Acclaim 18°-32° lens tray
15ACLTW	Acclaim 24°-44° lens tray
15ACSM	Lens safety mesh
20HC	Suspension hookclamp
20SC	Safety bond


Approvals

Fully tested and compliant to CE standards.



Photometric data

Tests conducted using a standard T27, 650W, 240V, 15,000 lumens lamp.

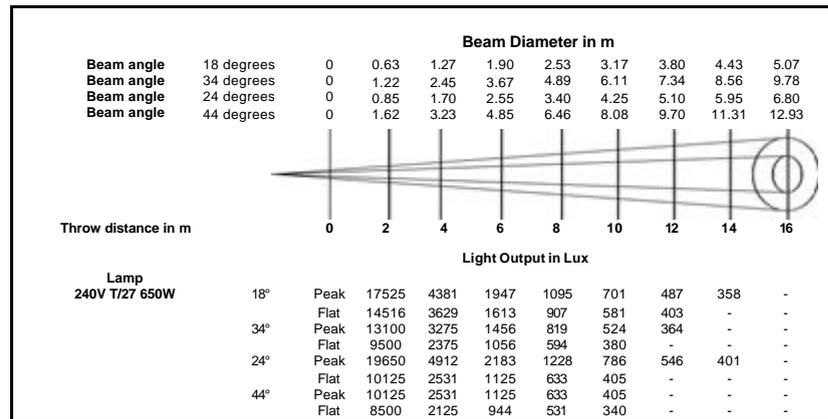

Physical Data

Weight: 5.1kg

Packed Weight: 5.7kg


Carton Size: 610 x 225 x 180

Carton Size Cubic: 0.025

Colour Frame Size: 125mm x 125mm

Pattern (Gobo) Size: M

Included: 4x shutters, 1x colour frame, 1x M12 nut & bolt set, instruction sheet.

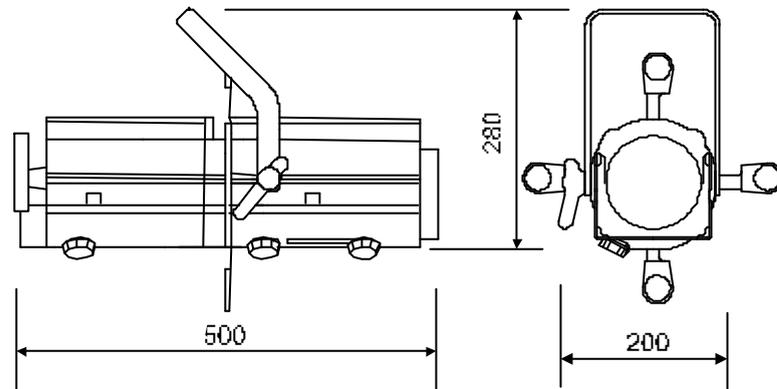

Selecon reserves the right to change the specifications without notice (June 2008).